


# Festival of Trees Playhouse Instructions


You are responsible to get the Playhouse to the Mountain America Expo Center on the Saturday after Thanksgiving. We cannot have trucks in the Expo Center on the following Monday. Any structure measuring more than the maximum measurement of 10' width x 16' length x 10' height will need to be delivered to the new owner by you, as anything exceeding this may require UDOT permits.

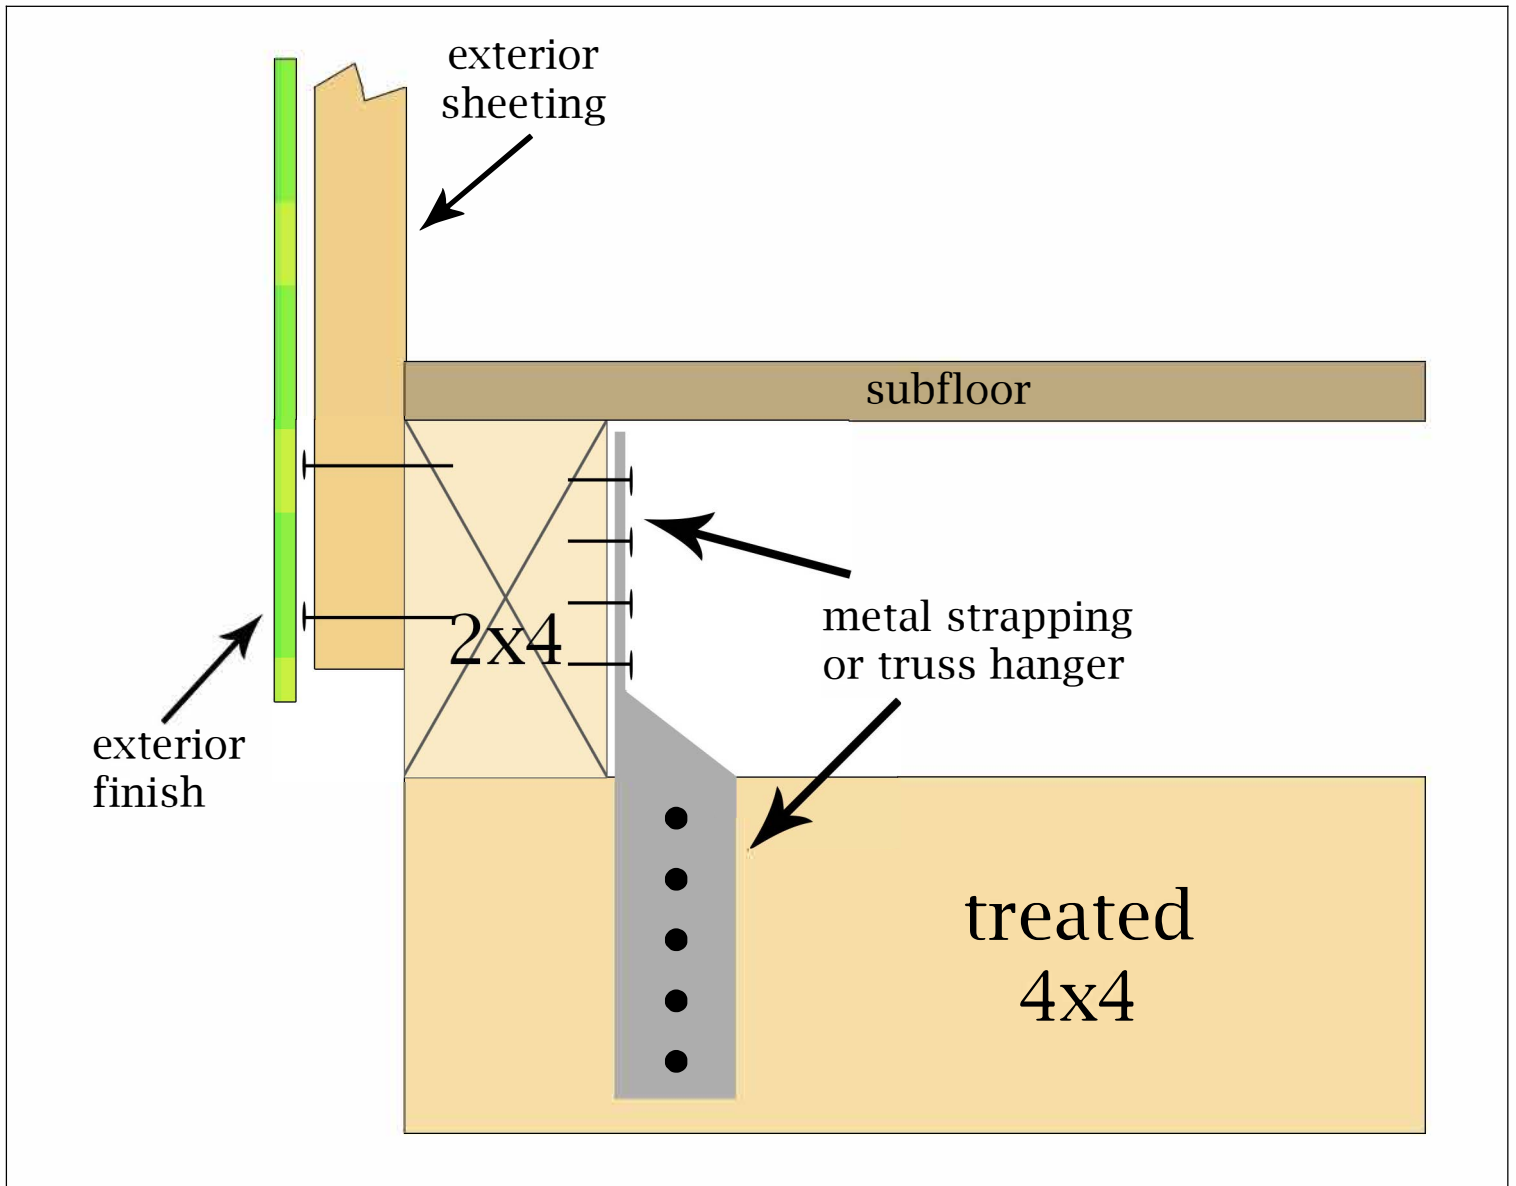

Take note that the exterior sheeting is NOT flush with the 2x4. When the forklift slides between the 4x4s and picks up the play-house by the 2x4s, the drag of the forks as they back away pulls the sheeting and exterior from the framing if flush.

# Festival of Trees Playhouse Instructions

From the bottom of the 4x4 to the highest point on the roof it can not be more than 10'. The maximum width and length can not exceed 10'x16'.

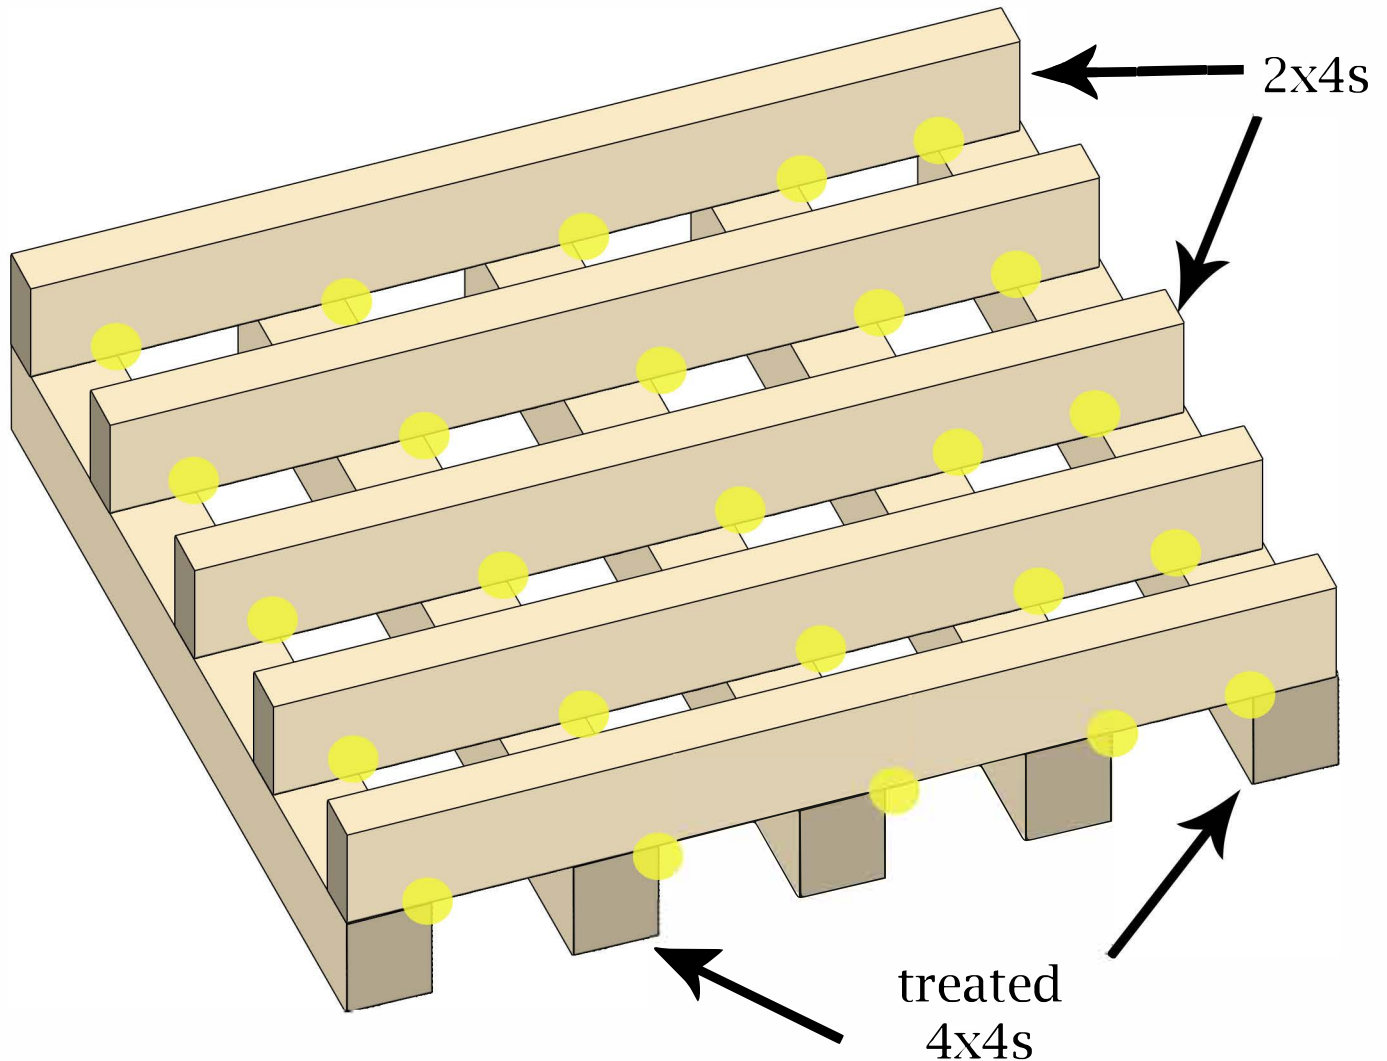

● Use a metal truss hanger or strap at each intersecting point to securely attach the 2x4s to the 4x4s.

You can then apply subfloor to the base.

Please nail any exterior sheeting to the 2x4s as to tie the sheer panels to the floor. Do not apply any sheeting or skirting around the 4x4s as this is how it is picked up by the forklift.